




BF-2

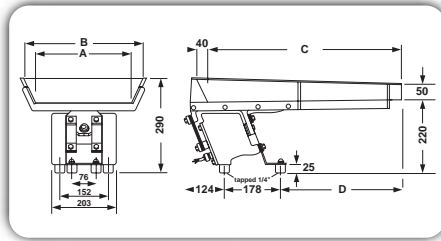

**BF-2**

CAPACITY	6.5 TONNES/HOUR	
	ON SAND AT 1600kg/m <sup>3</sup>	
VOLTAGE	230v	110v
CURRENT	2.0 AMPS	4.0 AMPS
FREQUENCY	50 Hz or 60 Hz	
	SINGLE PHASE	
WEIGHT	NET	SHIPPING
	kgs	30

Maximum Trough Weight - 10kg

**Dimensions (mm)**

A	B	C	D
200	270	762	465
250	320	762	465
300	370	600	385

**F-010/FH-010**

CAPACITY	3.5/4 TONNES/HOUR	
	ON SAND AT 1600kg/m <sup>3</sup>	
VOLTAGE	230v	110v
CURRENT	1/1.25 AMPS	2/2.5 AMPS
FREQUENCY	50 Hz or 60 Hz	
	SINGLE PHASE	
WEIGHT	NET	SHIPPING
	kgs	15


Maximum Trough Weight - F010 5.5kg

**F-010 Dimensions (mm)**


A	B	C	D
200	270	450	320
150	220	500	345
100	170	670	470

**FH-010 Dimensions (mm)**

200	270	500	345
150	320	500	345

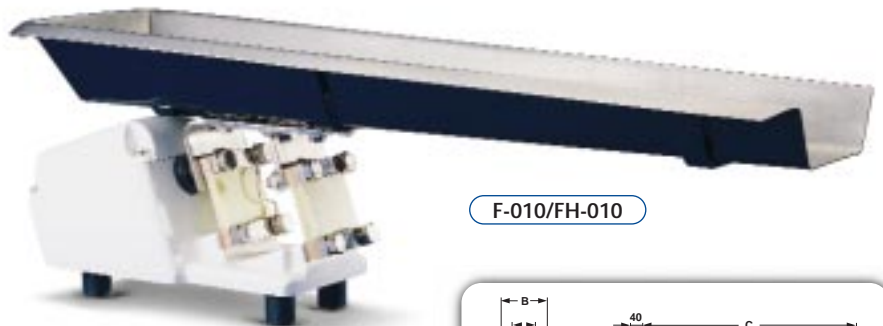

F-010/FH-010

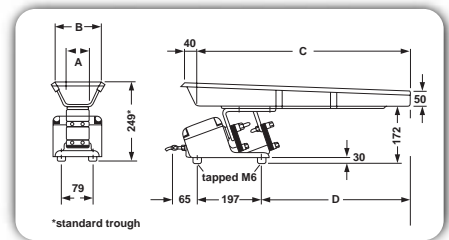

\*standard trough



F-T01

**F-T01**

CAPACITY	2 TONNES/HOUR	
	ON SAND AT 1600kg/m <sup>3</sup>	
VOLTAGE	230v	110v
CURRENT	0.4 AMPS	0.8 AMPS
FREQUENCY	50 Hz or 60 Hz	
	SINGLE PHASE	
WEIGHT	NET	SHIPPING
	kgs	11.5

Maximum Trough Weight - 2.7kg

**Dimensions (mm)**

A	B	C	D
150	220	300	187.5
100	170	450	334.5
75	145	450	334.5

